

Panel / Line regulator E53-6

spectro**cem**



Line pressure regulator LE53-6



Example: PE53 panel mounted


Product features

- 2-stage diaphragm line pressure regulator or for panel and panel surface mounting with anti-vibration device
- For corrosive, toxic gases and gas mixtures up to quality 6.0
- 6 ports for flexible and individual configuration
- Very high control accuracy
- Metal-to-metal seal to atmosphere
- Central filter
- Approved for use with oxygen
- New laboratory-style design
- Suitable for ECD applications
- Pressure regulator can be evacuated

Technical data

Inlet pressure P_1	max. 300 bar
Max. outlet pressure P_2	1,5 / 4 / 10 / 20 bar
Materials	
Body:	Stainless steel 1.4404
Diaphragm:	Hastelloy C276
Valve seat:	PCTFE, PTFE
Soft goods:	FKM / EPDM (NH ₃)
Filter:	Stainless steel 1.4404
In- / outlets	1/4"-NPT female
Temperature range	-20°C to +60°C
Leakrate (to atmosphere):	≤ 10 ⁻⁸ mbar l/s He
(via seat):	≤ 10 ⁻⁶ mbar l/s He
Weight	1,6 kg


Flow curves E53

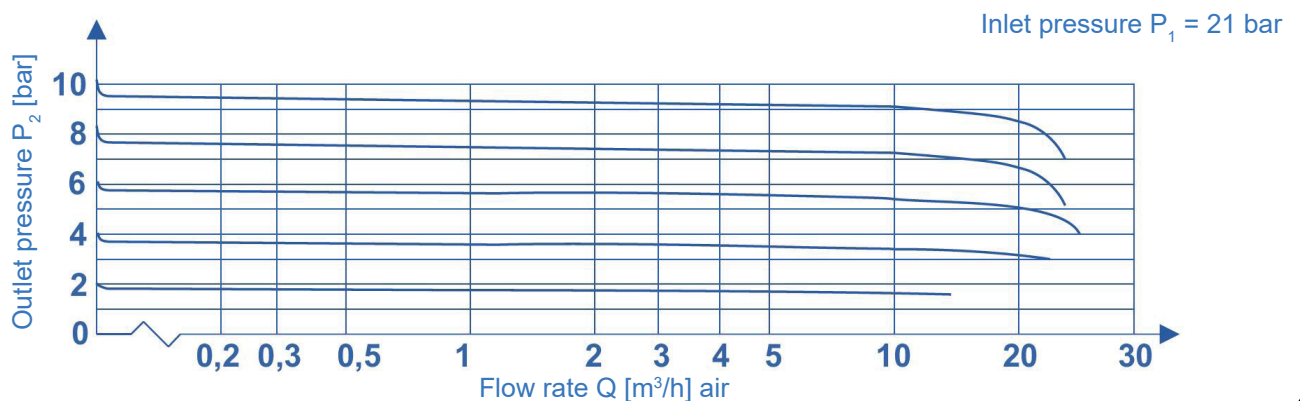

Panel / Line regulator E53-6

spectro**cem**

Dimensions E53-6

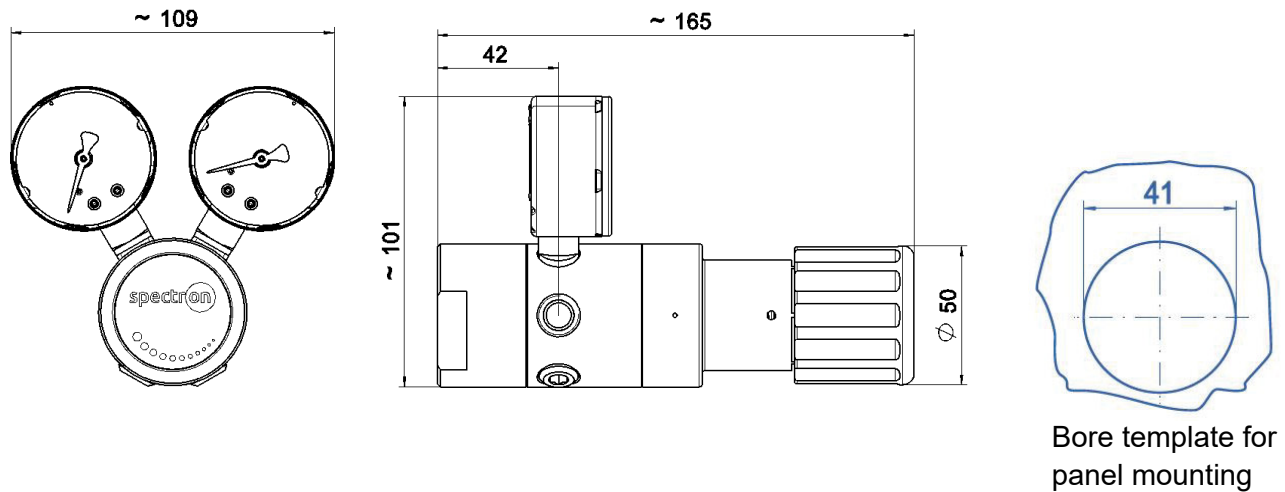


Ordering information:

Pressure regulators E53-6

In- / outlets

CE 1/4	1/8" / 1/4" / 1/2" - compression fitting (stainless steel)
CE 6	3 / 6 / 8 / 10 / 12 mm - compression fitting (stainless steel)
B	plug
A	relief valve - 1/4"-NPT-F
K	contact pressure gauge
M	pressure gauge
0	1/4"-NPT-F (port only)

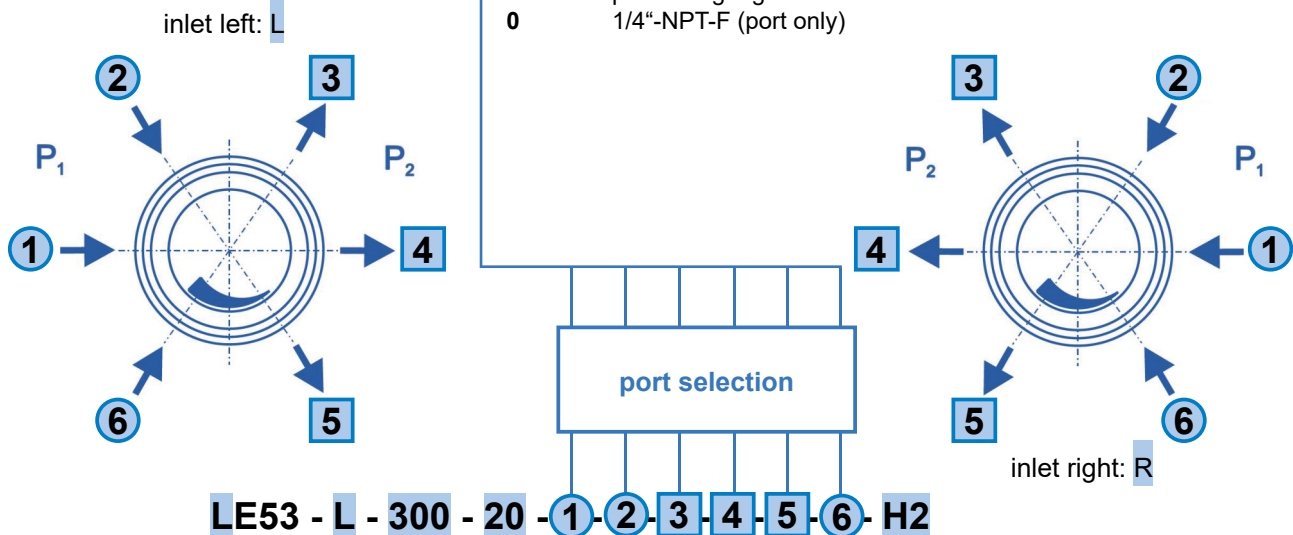

Type

L	Line regulator
P	Panel regulator

Inlet

L	left
R	right

Inlet pressure P_1

100	max. 100 bar
200	max. 200 bar
300	max. 300 bar

Outlet pressure P_2

1,5	max. 1,5 bar ($P_1 \leq 50$ bar)
4	max. 4 bar ($P_1 \leq 50$ bar)
10	max. 10 bar
20	max. 20 bar

Type of gas

Please specify type of gas

For inlet pressure up to 50 bar and outlet pressure of max. 1,5 or 4 bar please use E51.